



HUNTER 2.0

- | Ackerman Steering
- | Removable Battery
- | 150KG Heavy Load
- | Slope Parking
- | Secondary Development

» Customized Chassis Solution

The HUNTER 2.0 battery pack is lithium iron phosphate-based, offering flexible configuration to meet your task-based capacity needs. Customized speed planning up to 10km/h is available to meet the needs in various autonomous driving scenarios and support a wide set of use cases for industrial-grade robotics.



Portable battery packs are provided with two capacity options for easy switch.



Battery management system (BMS) ensures safety during operation.



Speed planning up to 10km/h is supported.



» Brand-new Power System

HUNTER 2.0 continues the simple and elegant look of the HUNTER series with all-steel body, 400w dual servo motor drive, independent front wheel steering and robust, precisely controlled power system to support smooth running, whether indoors or outdoors.



Advantageous car-like structure and low tire wear are suitable for high-endurance scenarios.



Independent front-wheel steering and rocker suspension make it possible to pass over speed bumps with ease.




400w dual servo motor with payload up to 150KG.





» Safe and Reliable Power-off Parking

HUNTER 2.0's slope parking feature allows a reliable standstill on a slope, thanks to the well-designed drive train. In the event of power outage or failure of the vehicle while traversing sloped terrains, wheels will be locked in place without slipping off to ensure stable and reliable safety performance.



» SPECIFICATIONS

Model	HUNTER 2.0	Suspension Form	Front Wheel Independent Suspension
Dimensions	980 x 745x 380mm	Drive System Form	Front-wheel Ackerman Steering
	W x H x D		Rear-Wheel Drive
Wheelbase	650mm	Working Temperature	-20~65°C
Track	605mm	Battery	24V30Ah (Standard)
			24V60Ah (Optional)
Speed and Payload	6km/h, 150Payload (Standard)	MAX Travel (without loading)	22Km (24V30Ah Battery)
	10km/h, 80KG Payload (Optional)		40Km (24V60Ah Battery)
	Customizable		
Weight	65~72KG	Charger	AC 220V Charger Output 240W
Minimum Turning	1.6m	Charger Period	3.5h (24V30Ah Battery)
			7h (24V60Ah Battery)
Climbing Ability	<10°	Outward Supply	24V15A
	With Loading		Maximum total output current
Obstacle Surmounting Capacity	5cm	Code Wheel	2500 Lines
	Single-stage Right-angle Step		Magnetic Incremental Encoder
Minimum Ground Clearance	100mm	Motor	Drive 2x400W steering 400W Servo Motor
Minimum Braking Distance	0.2m	System Interface	Standard CAN
	6km/h -> 0km/h (It depends on the ground conditions)		232 Serial Port
Steering Accuracy	0.5°	Protection Level	IP22(Customizable IP54)
Parking Function	Electromagnetic power-off parking, maximum 10° ramp parking(For parking only)		

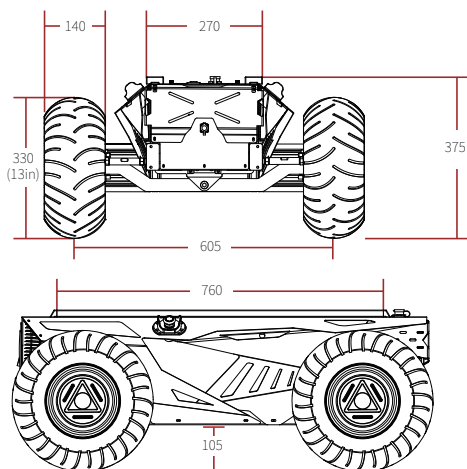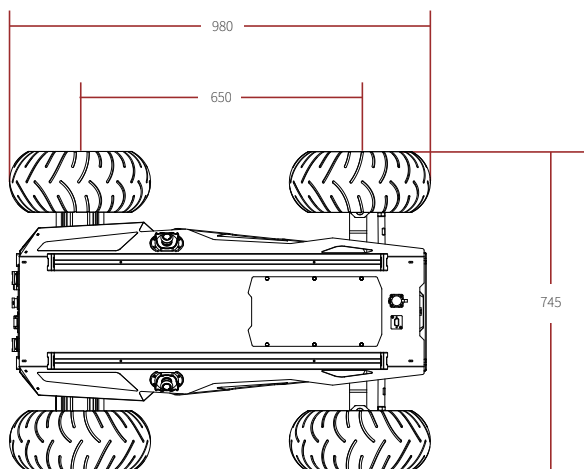



LinkedIn



Youtube

WWW.AGILEX.AI

AgileX Robotics CO., Ltd
Email: sales@agilex.ai

Tel: +86-769-22892150
+86-19925374409